

YOKOGAWA 

**Handpicked  
small!**

1.5kg A5 file size

**Intelligent!!**

Automatic Room  
Light Sensing

**Bright!!**

1100 ANSI LUMEN

**Palm-Size**



**Supports SXGA  
(Real XGA Display)**

# Microportable DLP Projector Yokogawa D-1200X

Yokogawa D-1200X has no equal, an ideal presentation tool for the road warrior, regional travelers, professional occupation with full time presentation, as well as good for the educational market. This ultra portable projector promises to reduce your travel weight, to provide crystal clear image for class/presentation.

This "Real IT communication Product" is very versatile. Digital magnify, Rear Projection, Ceiling Mount, Digital Keystone Correction, USB, and its connectivity (PC and Video).




  
A TEXAS INSTRUMENTS TECHNOLOGY

  
digital visual interface

# Microportable XGA DLP Projector Yokogawa D-1200X



Detachable Video Module as standard

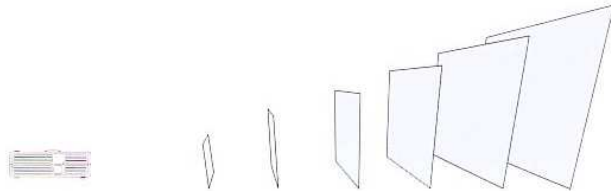

### Screen width

Distance to screen in meters	1,30	2,00	4,00	6,00	8,00	10,00
Min. Width in meters	0,58	0,90	1,79	2,69	3,59	4,48
Max. Width in meters	0,76	1,17	2,34	3,51	4,68	5,85



### Screen diagonal

Distance to screen in meters	1,30	2,00	4,00	6,00	8,00	10,00
Min. Diagonal in inches	29	44	89	133	177	221
Max. Diagonal in inches	38	58	115	173	231	289

### Ideal travel companion



### Multimedia solution (Video Module)

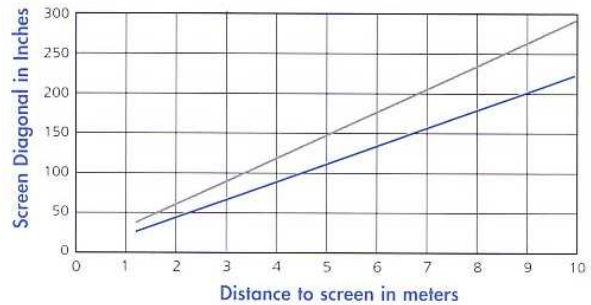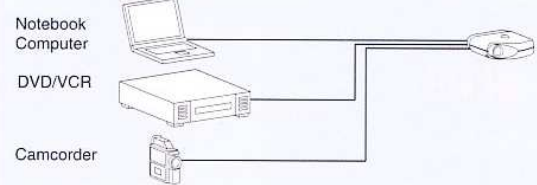

		Yokogawa D-1200X
Panel	Size	0.67" DMD Device
	Drive	DMD Drive
	NO Pixel	786,482 Pixels (1024x768)
Projection Lens		Manual Zoom 1.3x f=30-39mm F/2.6 Manual Focus
Lamp		120W UHP Lamp (2000Hours)
Screen size		30~230" 0.75-5.85m
Brightness		1100ANSI Lumen
Contrast		500:1
Color reproduction		Full Color 16.7M
Uplift		12 degree
Keystone Correction		±35.4 degree
Built-in speaker		1W Mono
Frequency		Hor 15~100KHz Ver 43.5~130Hz
Resolution	RGB	640x480 720x400 800x600 832x624 1024x768 1152x864 1152x870 1280x1024
	Video	NTSC, NTSC4.43 PAL, SECAM 12-140MHz
Input	Video	VIDEO(RCA) x1, S-VIDEO x1, /RCA(stereo) x1
	PC	RGB(miniD-Sub15p) DVI(DVI-D 29p)
Sound Out		3.5mm Stereo mini Jack x1
Com	Wireless	Remote
	Mouse	USB
Operation Noise		30dB
Temp/Humidity		5-35°C 20-80%RH
Weight		1.5kg
Dimension		181(w) x 214(d) x 60(h)mm
Power		AC90V~264V 50/60Hz • 170W



Digital Presentation Camera DMC-27X



Certificate of Approval ISO 9001



Certificate of Approval ISO 14001  
Yokogawa obtains comprehensive ISO14001-compliant environmental management system (EMS).  
Approval Certificate No:EC97J1051  
Original Approval:29 July 1997



## Yokogawa MAT Corporation

<http://www.alliance-intl.com/yokogawa>

### Distributor and Service Center:

**Alliance International**  
US Division Headquarters  
9171 Towne Centre Dr, Ste 500  
San Diego, CA 92122  
Tel: (858) 558-2030  
Fax: (858) 558-2031